




# COSMO Flood Lights



This versatile solar flood light has a separate solar panel to collect energy from the sun. The solar panel also contains a sensor which activates the light when it is sufficiently dark. This unit comes with a remote control so that you can select your desired mode, brightness and timer options. After a full charge, this solar light can be activated in increments of 10% brightness for a full 12 hours. If not fully charged, it has a built-in feature that adjusts to the maximum possible brightness for up to 12 hours. It can also be set on a timer mode for 3 hours, or 5 hours. There is also a Manual mode that allows the user to turn on the light and keep it on, for as long as desired. In this mode, the light will not turn off automatically during daylight hours and must be turned off manually.

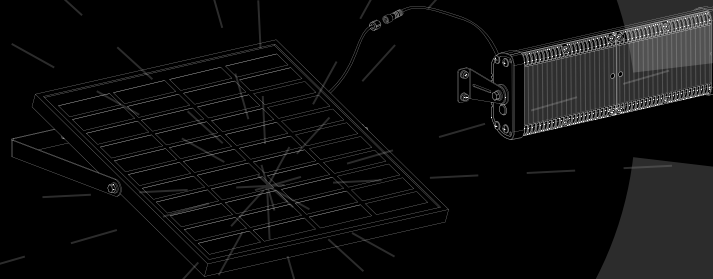

For more information, please visit our website:  
[www.soltechlighting.com](http://www.soltechlighting.com)





# APPLICATIONS

20W, 50W COSMO Flood Lights

COSMO Flood lights can be used in gardens, courtyards, tennis courts and landscapes as well as for extra lighting in parking lots. It also serves to brighten pathways in parks or on campuses, or any location where having an LED outdoor light would be helpful, while avoiding the expense of running wires to the location.



**Huntington Billboards**  
Kentucky, USA  
Billboard Lighting Project



**Candelas Community**  
Colorado, USA  
Shelter Lighting Project



**Carport Lighting**



**Billboard Lighting**



# FEATURES

20W, 50W COSMO Flood Lights



**Generates More Solar Energy and Stores More Energy**

- Adjusting the solar panel angle maximizes solar collection & allows snow to slide off.
- The solar flood light has a separate solar panel to collect energy from the sun.
- (IAP) Intelligent Adaptive Program Battery Control Technology that stays lit all night, even through cloudy or rainy days.



**Multifunctional & Flexible**

- The light can be used separately from the solar panel for both indoor and outdoor uses
- Use outdoor as a flag pole light, sign light, billboard light, or wall pack
- Use indoor as bus stop & shelter lighting



**Longer Life**

- 6 operating modes for indoor and outdoor use
- Remote control can adjust brightness and set the timer
- LED Indicators show 3 levels power storage



**Highly Versatile Design**

- The easiest way to bring lighting to both indoor and outdoor applications



COSMO  
20W




COSMO  
50W




DIMENSIONAL DRAWINGS

COSMO 20W

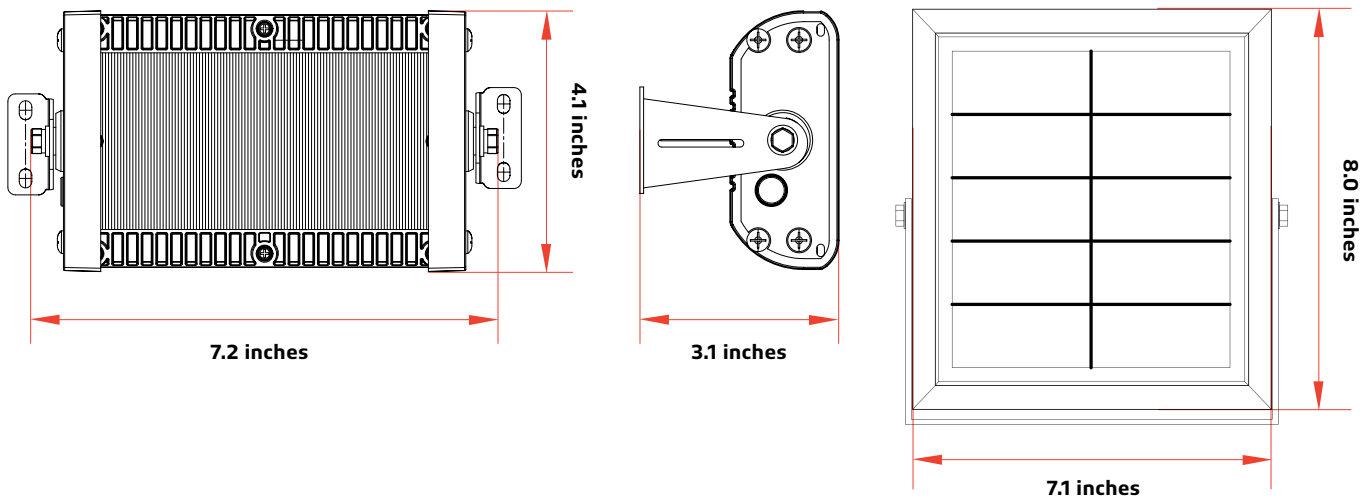

COSMO 50W

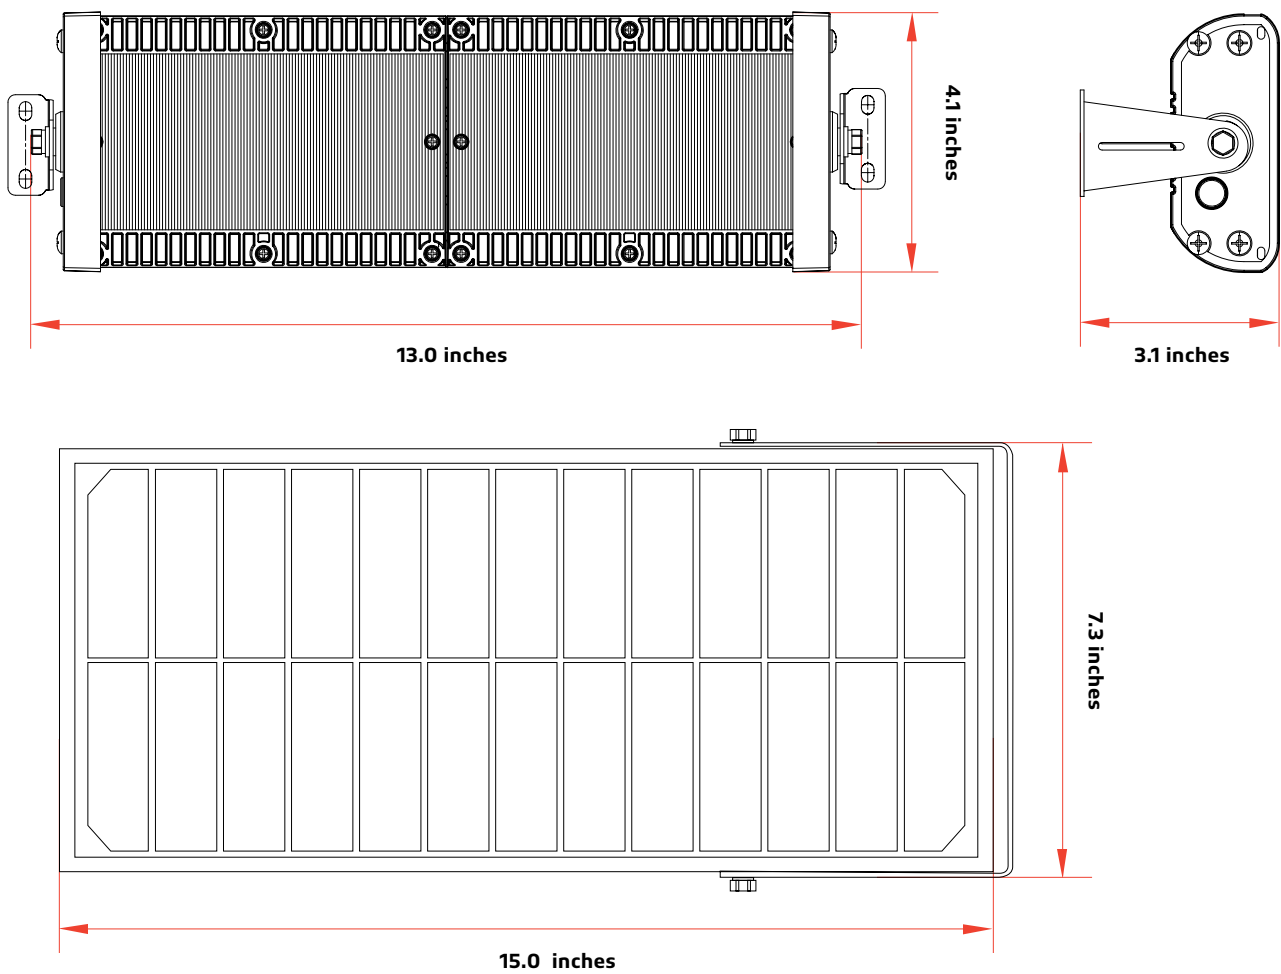

SPECIFICATIONS & PERFORMANCE

20W, 50W COSMO Flood Lights

This solar flood light has a separate solar panel to collect the energy from the sun, eliminating the need for expensive wiring and installation costs.


SPECIFICATIONS	COSMO 20W	COSMO 50W
LED NOMINAL POWER	20W	50W
SOLAR PANEL	Mono-Crystalline Silicon 14V 5W	Mono-Crystalline Silicon 14V 10W
LITHIUM ION BATTERY	28.86WH 3.7V 2.6AH	57.72WH 3.7V 2.6AH
LUMEN OUTPUT@4,000K	3,000	6,000
PRODUCT SIZE	Solar Panel 8.0 X 7.1 Inches Light 7.2 X 4.1 X 3.1 Inches	Solar Panel 15.0 X 7.3 Inches Light 13.0 X 4.1 X 3.1 Inches
IP RATING	IP65	IP65
EPA	0.67 FT	1.28 FT
CRI	CRI > 70	CRI > 70
CASTING	PC & ALUMINUM	PC & ALUMINUM
CABLE LENGTH	11.5 FT	11.5 FT
EFFICIENCY@4,000K	150 LM/W	120 LM/W
LED	OSRAM 3030	OSRAM 3030
* CHARGING TIME	7.5 Hours (1000W/m <sup>2</sup> )	7.5 Hours (1000W/m <sup>2</sup> )
RUN TIME	12-14 Hours	12-14 Hours
OPERATION MODE	6 Operating Modes	6 Operating Modes
CCT	4,000K	4,000K
* OPERATING TEMPERATURE	-4 °F to 140 °F	-4 °F to 140 °F
* CHARGING TEMPERATURE	14 °F to 113 °F	14 °F to 113 °F

\* The temperature can impact the battery's charging and normal operation.


\* The solar charge time data is based on 77 degree F ambient temperature, with the panel pointed directly at the solar radiation. The standard radiation value is 1000W/m².

# PHOTOMETRY

COSMO 20W

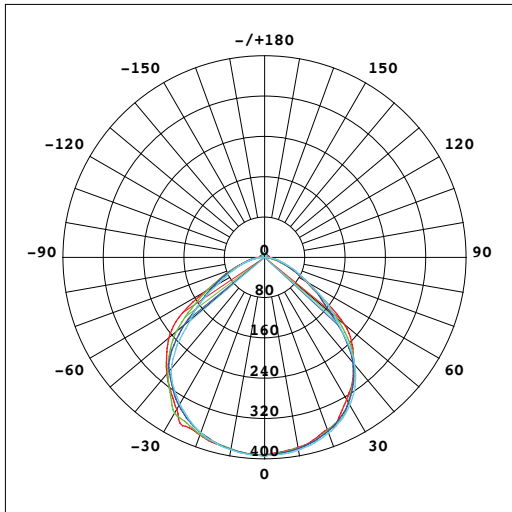

COSMO 50W

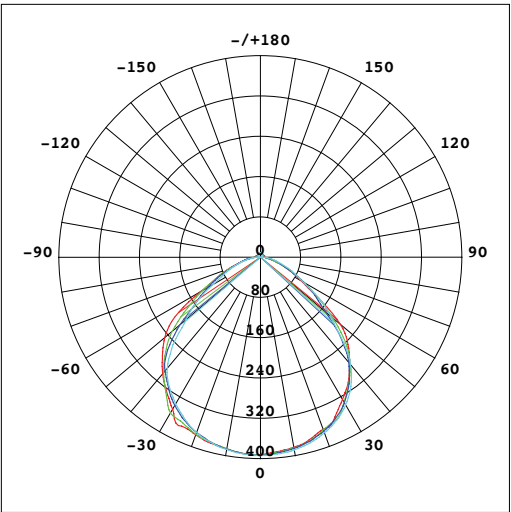

# PRODUCT NUMBER BUILDER

Example: STL-SWL204WMBK

This example product number is for COSMO 20 watt, 4,000K CCT, wall mount installation, with black finish.

SERIES	WATTAGE	COLOR TEMPERATURE	MOUNTING OPTIONS	FINISH
--------	---------	-------------------	------------------	--------

STL-SWL=COSMO	20=20W 50=50W	4=4,000K 5=5,000K	WM=WALL MOUNT	BK=BLACK
---------------	------------------	----------------------	---------------	----------

-

-

-

-

Sample Number: STL-SWL20XYYZZ

Please **DO NOT** send the generic sample number directly to our salesperson. Use the information in the chart, above, to create a model number with the correct series, wattage, CCT, mounting options, and finish for the product options that you want.


## QUICK SHIP PRODUCT

STL-SWL204WMBK  
STL-SWL504WMBK



MOUNTING ACCESSORIES (20W, 50W)


WALL MOUNT

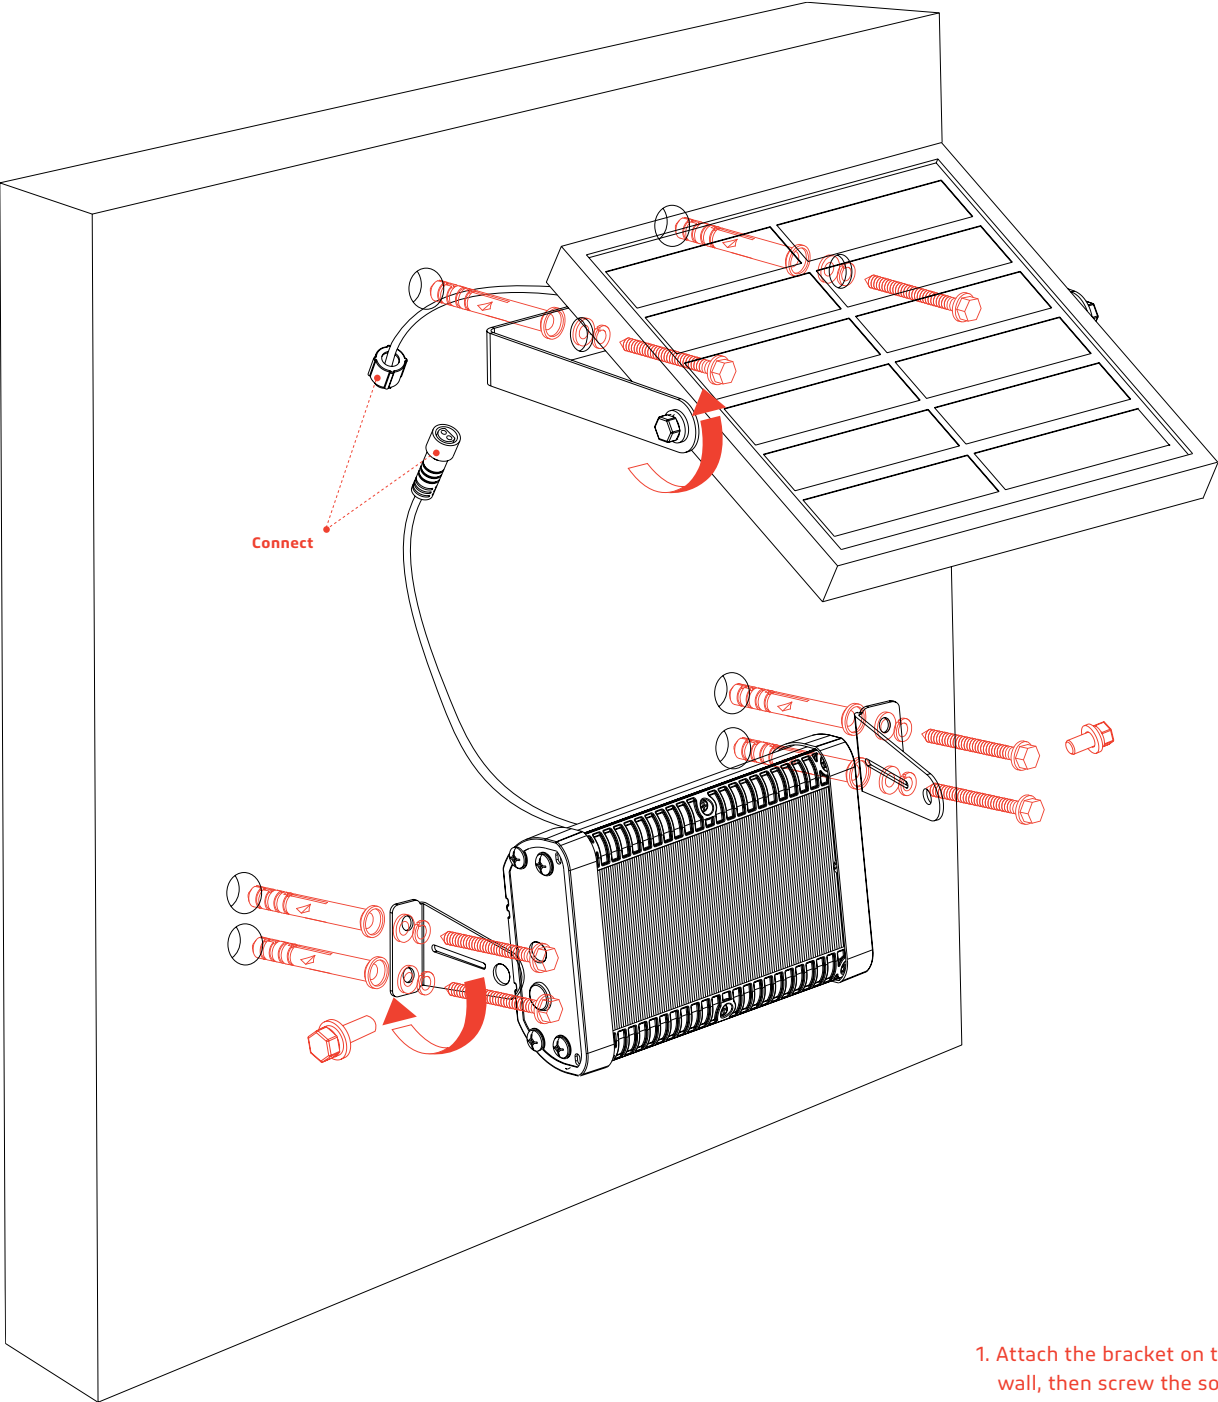

- 1. Attach the bracket on the wall, then screw the solar panel onto the bracket.
- 2. Screw the bracket onto the fixture housing and mount it onto the wall.
- 3. Connect the light and solar panel cables.



OPERATING MODES

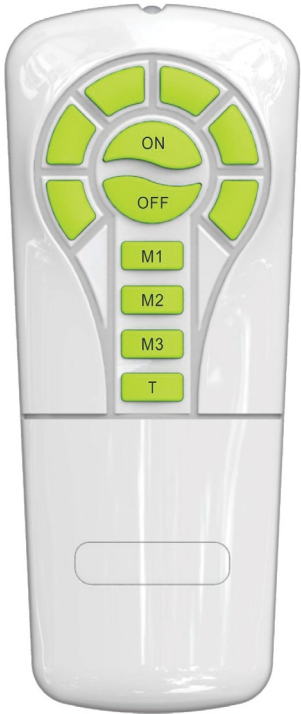

20W

- M1 50% 5Hrs + 10% Till Dawn
- M2 30% 5Hrs + 10% Till Dawn
- M3 20% Till Dawn
- M1 + T 100% 2Hrs + 50% 5Hrs + 10% Till Dawn
- M2 + T 100% 2Hrs + 30% 5Hrs + 10% Till Dawn
- M3 + T 100% 2Hrs + 20% Till Dawn

LIGHTING MODE INDICATOR

Red: M1  
Green: M2  
Orange: M3  
T: Green Light Flashes

BATTERY CAPACITY INDICATOR

Green: >70%  
Orange: 30%–70%  
Red: 10%–30%  
Note: The fixture is in low voltage protection status when the red light flashes.

50W

- M1 50% 5Hrs + 10% Till Dawn
- M2 30% 5Hrs + 10% Till Dawn
- M3 20% Till Dawn
- M1 + T 100% 2Hrs + 50% 5Hrs + 10% Till Dawn
- M2 + T 100% 2Hrs + 30% 5Hrs + 10% Till Dawn
- M3 + T 100% 2Hrs + 20% Till Dawn

