



HBQ HIGH BAY LIGHT


150W DLC PREMIUM

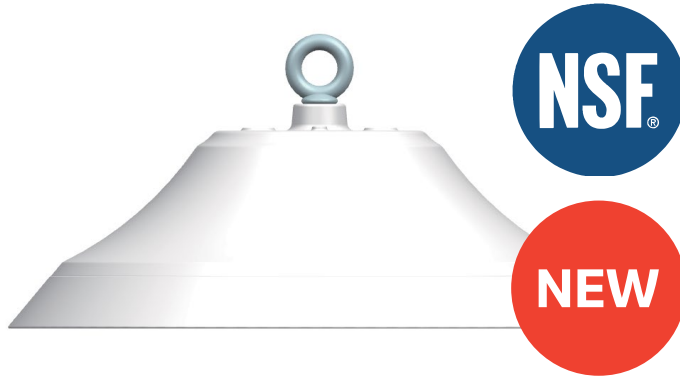

DIMENSIONAL DRAWING

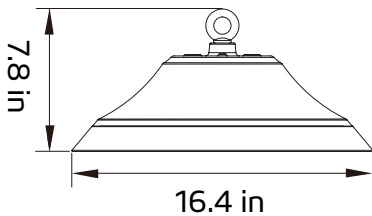

PHOTOMETRY



PRODUCT NUMBER BUILDER

Example: STLHBQ1504HKWH

SOLTECH High Bay HBQ 150 watt, 4000K, Hook installation, with a White finish.

TECHNICAL SPECIFICATIONS

HOUSING	ADC12 aluminum heat sink, Outdoor powder coating.
VOLTAGE	100-347V, 60Hz AC
LED	LumiLEDs
EFFICACY	135 LM/W
LUMENS@5000K	20,250 lumens
POWER FACTOR	≥0.9
BEAM ANGLE	90°
THD	<20%
OPERATING TEMP	-40°F-104°F
ALUMINUM LED BOARD	High conductive, Waterproof, Aging resistance, Salt mist resistance, Long-life.
CONTROLS / DIMMING	0-10V Dimming
CCT	4000K and 5000K
CRI	>80
RATED LIFE	70,000 hours

SERIES	WATT (W -8%~+5%)	COLOR TEMP (X)	MOUNTING OPTIONS (YY)	FINISH (ZZ)	VOLTAGE (V) (Blank)	OPTIC TYPE (Blank)	DIMMING (Blank)
STLHBQ	150	4=4000K 5=5000K	HK=HOOK	WH=WHITE	100-347	90°	0-10V/PWM/VR

PRODUCT PARAMETER

MODEL	DIMENSION (in)	VOLTAGE (V)	WATT (W -8%~+5%)	LUMENS @ 5000K(Lm)	EFFICACY (Lm/w)	OPTIC TYPE	DIMMING
STLHBQ150XYYZZ	7.8X16.4 in	100-347	150	20,250	135	90°	0-10V/PWM/VR